

KP-250 PG2

Two-way Keypad that Communicates with PowerMaster Panels

with
PowerG
Technology



Features that Make a Difference:


- Supports user and installer menus
- Enables a complete view and control of the system
- Designed to work with all PowerMaster panels, including new PowerMaster-33 G2 for residential and SME markets
- Integrated sounder
- Sleek design; wall-mounted or desktop
- Provides user with feedback on commands
- Easy use by keypad, proximity tags or RFID cards
- Partition support
- Provides audible and visual entry/exit warnings
- Extended range eliminates the need for repeaters
- Superb value for price

KP-250 PG2 is a stylish and easy to use two-way wireless user interface for PowerMaster systems. It is an ideal solution for users in both residential and small business premises.

Decorative proximity tags enable users to arm/disarm the system, initiate fire and panic alarms and review system status. Allows installers to maximize system security by installing the panel in a hidden location.

Specifications:

| | |
|--|---|
| Communication protocol | PowerG |
| Frequency band (MHz) | USA: 912-918 Europe and rest of world: 433-434, 868-869 |
| Battery type | 4AA, 3V, Alkaline |
| Battery life | Up to 3 years (with typical use) |
| Power source (optional) | 5-12VDC |
| Operating temperatures: | 0°C to 55°C (32°F to 131°F) |
| Dimensions | 150 x 100 x 20mm (5.9 x 3.9 x 0.8in) |
| Weight (including battery and bracket) | .379g (13oz) |
| Compliance | Europe: EN301489, EN60950, EN50131-1, EN50131-3 USA: CFR 47 part 15 |

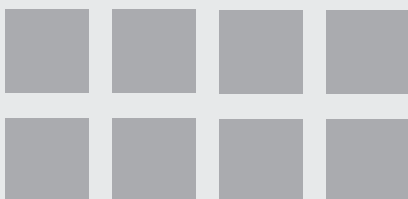

www.visonic.com

Contact Visonic for further information:
Email: info@visonic.com