

# ATC Sienna Outdoor Quartz Infra-Red Electric Heaters



ATC Sienna 2200W  
Infrared Heater Black



ATC Sienna 2200W  
Infrared Heater Silver



ATC Sienna 4000W  
Infrared Heater Black



ATC Sienna 4000W  
Infrared Heater Silver

Waterproof IPX5  
'Feel the Heat'



## Description

Model	Sienna 2200	Sienna 4000
Product Code	SIE2.2KW-BL   SIE 2.2KW-SL	SIE4KW-BL   SIE4KW-SL
Colour	Black   Silver	Black   Silver

## Attractive Design with High Performance

The Sienna high-performance range of Outdoor Quartz Infra-Red electric heaters are suitable for many applications, industries and environments.

Fitted with Low Glare lamps the heaters provide a comfortable level of heat without the sharp glare of standard infra-red lamps. The Sienna Heaters are for mounting on the wall or structure from 2.7m to 3.5m. Attractive design with a high performance these range of heaters will enhance the outdoor heating experience.

Available in two sizes, 2200W and 4000W, rated IPX5 Weatherproof, the Sienna range is available in Black or Silver finishes.

## Product Features

- Attractive Design
- Low Glare Element
- Parabolic Reflector for Even Spread of Heat
- Creates Comfortable Environment
- 2 Sizes; 2200W & 4000W
- 2 Colours; Silver and Black
- Multiple Mounting Heights
- Energy Efficient
- Costs £0.17p per kWh to run
- Instant Heat
- Wall Mounting
- Suitable for Commercial – Industrial Applications
- Maintenance Free
- Easy to Install
- IPX5 Weatherproof



Restaurants



Pubs



Factories



Hotels



Warehouses



Stadia

## ATC Sienna Outdoor Quartz Infra-Red Electric Heaters

### Technical Details

#### Description

Model	Sienna 2200	Sienna 4000
Product Code	SIE2.2KW-BL   SIE 2.2KW-SL	SIE4KW-BL   SIE4KW-SL
Colour	Black   Silver	Black   Silver

#### Electrical Specifications

Power output (Watts)	2200	4000
Voltage	220-240	220-240
Frequency (Hertz)	50-60	50-60
Current (Amps)	10	18
Lamps	1	2
Lamp Arrangement	Single	Stacked Vertically
Lamp type	Low Glare	Low Glare
Emmission	IR-A	IR-A

#### Mounting and Installation

Installation	Wall / Ceiling (@45° Only)	Wall / Ceiling (@45° Only)
Mounting height	2.7 - 3m	3-3.5m
Heating Area (M²)* @45°	10 - 15	20 - 32
Minimum cable size	3 x 1.5²	2x (3 x 1.5²)
Supplied with or without cable	With (5m)	With (2 x 1.5m)
Lamps switchable or all together	N/A	Separate supplies for each lamp
Dimmable ( With controller)	Yes	Yes

#### Dimensions & Weight


Dimensions ( HxWx D) mm	195x465x113	195x910x113
Weight (Kg - Nett)	2.45	4.05
IP Rating	IPX5	IPX5

#### Approvals

Certifications	CE, IMQ-GS,	CE, IMQ-GS,
----------------	-------------	-------------

## Heating Area m²

### Wall Mounted 45°

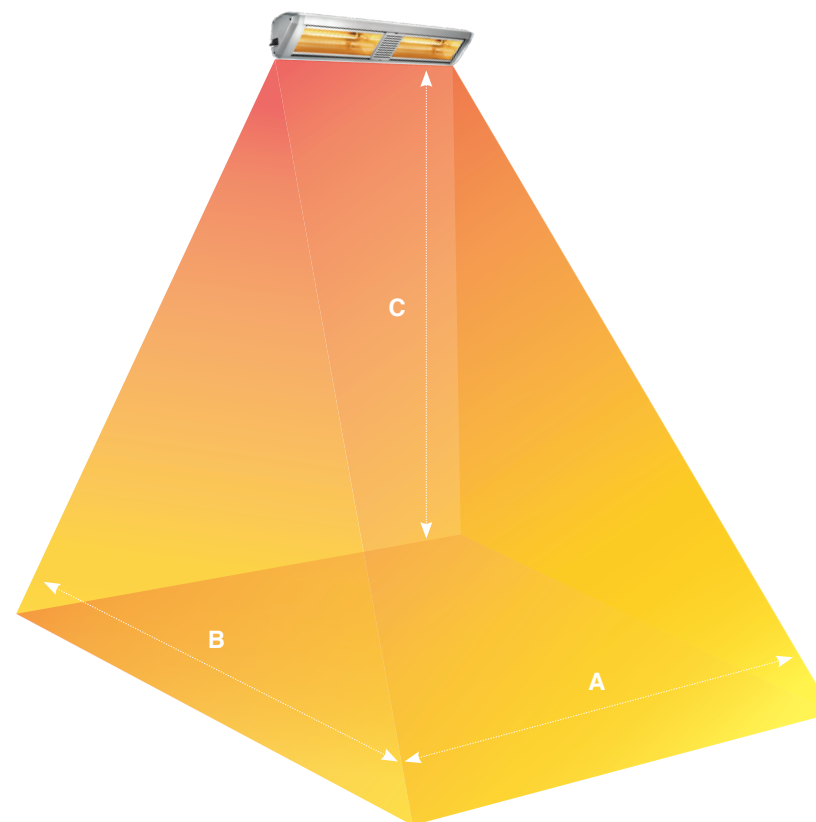

Model	Wall Mounted 45°		
	A	B	C
SIE2.2KW	5	3	3
SIE4KW	8	4	4

It is recommended to install Outdoor radiant heaters protected from strong breezes or crosswinds. Based on average ambient temperature of 10°C.